

# Optimal-Throughput Hop Distance in Dense Mobile Ad Hoc Networks

Dinesh Kumar, Anurag Kumar, Venkatesh Ramaiyan, Eitan Altman

## Abstract

### I. INTRODUCTION

Diverse issues about Mobile Ad Hoc Networks (MANETs) like medium access scheduling, routing protocols, transmission power control and performance analysis have been the focus of research in the past few years. In this paper, we study the optimal next hop distance that maximizes the system *end-to-end flow throughput* in a mobile multi-hop wireless network environment subject to a network average power constraint. In our investigation we assume a spatially dense spread-out of nodes and we incorporate channel gain due to path-loss caused by the mobility of nodes. We consider a *periphery* limited mobility scenario in which nodes are restricted to move in their own local, approximately circular, periphery. For the calculation of the average throughput with path-loss, this kind of a mobility model leads us to compute the probability density function (PDF) of random distance between two nodes inside their circular periphery. Computation of this PDF constitutes a problem in geometric probability theory and to the best of our knowledge the derivation of PDF of random distance between any two points in each of two circles has never been investigated before. This is thus the first main contribution of this paper. The second main contribution of this paper is that, with reference to the plenitude of literature available on MANETs, ours is the first attempt to derive a throughput maximizing optimal hop distance in a dense ad hoc network environment with such a restricted mobility model.

### II. NETWORK AND MOBILITY MODEL

Consider a multi-hop wireless network with a dense collection of mobile nodes. A contention based distributed channel access mechanism such as the CSMA/CA based DCF is employed by nodes for transmission scheduling. It is assumed that all nodes use the same contention mechanism with identical

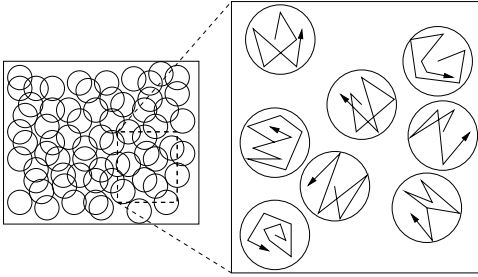


Fig. 1. *Periphery* limited mobility model

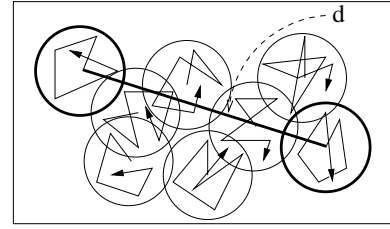


Fig. 2. Consecutive relay nodes do not overlap

parameters and every node has packets to be transmitted at all times. For control signalling (such as RTS/CTS in IEEE 802.11), nodes do not employ power control and hence use constant power. We assume a "single cell" situation in which control packets are heard by all nodes in the network and only one transmitter-receiver pair can successfully transmit at any time. It is further assumed that, during control signalling, channel gain estimation at each transmitter side is possible and it can select the power level for data transmission.

We assume a *periphery* limited mobility scenario in which every node is restricted to move within an approximate circular periphery. Inside their confined area, the movement of nodes is in accordance with any abstract mobility model that generates a uniform spatial distribution of nodes at steady-state. Figure 1 shows such a scenario. We could approximate the periphery by a square or any other shape but a circle is a more natural choice. For the sake of clarity, the magnified box shows only non-overlapping periphery nodes, but actually there are also neighboring nodes with overlapping peripheries, present, as shown in the left box. This kind of a mobility model can be readily applied to various situations. For example, a MANET formed by security guards who are restricted to move in their assigned security zones during a public event. A similar MANET formed by people across different rooms of a building restricted to move in their rooms. Soldiers in a battlefield moving inside their own troops, a group of sensor robots moving in a mine field or nuclear establishments restricted to their confined areas, etc are other examples. With such a mobility model, our goal is to obtain an optimal hop distance  $d$  between the periphery centers of two relay nodes (Figure 2) that maximizes an end-to-end flow throughput measure. We assume that peripheries of consecutive relay nodes forming a route do not overlap (Figure 2). Thus any feasible hop distance  $d$  satisfies  $d > 2a$  where  $a$  is the radius of the circular periphery.

Our model incorporates only randomly varying path-loss characteristics of channel gain and does not include any multi-path fading or shadowing effects. Since a transmitter can estimate the channel gain to its intended receiver during control signalling (e.g., RTS/CTS), channel state information can be used by

the transmitter to apply power control during each transmission opportunity. In our model, we assume that power control is applied in order to compensate for the channel gain due to varying path-loss caused by mobility of nodes. If the channel gain observed by a transmitter is denoted by  $h$  and  $P(h)$  denotes the corresponding power control applied, the achieved transmission rate by Shannon's formula is then given by  $C(h) = W \log_2 \left( 1 + \frac{P(h)h^\alpha}{\sigma^2} \right)$  where,  $W$  is the RF bandwidth,  $\sigma^2$  is AWGN power and  $\alpha$  is a constant depending on the minimum reference distance  $2a$ .

### III. BACKGROUND AND PROBLEM OBJECTIVES

With multi-hop communication between a source and destination taking place in such a scenario, there is an inherent tradeoff between employing shortest path routing (in terms of number of hops) with high transmission power and many small hops with low transmission power. Shortest path routing (Long hop distance routing) with high transmission power can account for minuscule end-to-end packet delays but at the same time can easily result in frequent link failures and fast depletion of battery energy. Instead, use of small hops with low transmission power can overcome the disadvantages of the former case, but on the other side, floods the network with relatively much higher number of packets. These arguments clearly illustrate the need for an optimal power control policy combined with an optimal hop distance choice. Such an optimization problem for fixed multi-hop networks has been studied in [1] in which the authors obtain an optimal power control and hop distance that maximizes an end-to-end flow throughput measure in bit-metres/sec. In this paper we use a slightly modified version of the results obtained for fixed networks in [1]. Our network model is similar to the model used in [1] augmented by our mobility model described in Section II. For the sake of clarity we briefly re-visit the derivation of results in [1] to deduce a slightly modified version for our use. In the rest of the paper, when we say that the distance between two nodes is  $d$ , we always actually mean that the distance between the centers of the periphery circles of the two nodes is  $d$ .

#### A. Objective function with end-to-end flow throughput

Consider a source and a destination that are distance  $D$  apart and engage intermediate relay nodes for multi-hop communication. By the dense node spread-out assumption, we can always find a multi-hop path between a source and destination such that the periphery centers of the relay nodes lie on the straight line connecting them. We assume that for optimal performance, the distances between consecutive relay nodes are all equal to  $d$  metres. Let  $\Theta(d)$  denote the aggregate throughput of all source-destination pairs in the network. We consider the *fixed transmission time* case [1] along with channel gain due to variable

path-loss caused by mobility of nodes. By fixed transmission time it is meant that, upon winning channel access, a node is allowed to transmit only for a fixed amount of time  $T$  irrespective of the channel conditions. If power control is applied during a transmission opportunity then the node will be able to transmit only  $L(h) := C(h)T$  amounts of data. Moreover, the data transmission rate in the network would be given by (see [2], [3])

$$\Theta(d) = \frac{p_s \int_h L(h) g_H(h) dh}{p_i T_i + p_c T_c + p_s \left( T_o + p_{tr} \frac{L(h)}{C(h)} \right)}$$

where,  $p_i$  is the probability that the contention period goes idle,  $p_s$  is the probability that there is a successful transmission,  $p_c$  is the probability that there is a collision,  $T_i$  is the average idle time,  $T_o$  and  $T_c$  are fixed overheads associated with a successful transmission and a collision, respectively,  $g_H(h)$  is the path-loss distribution and  $(1 - p_{tr})$  corresponds to the fraction of  $T$  seconds long transmission opportunities that were left idle due to bad channel condition.

Now, if we suppose that all source-destination pairs are distance  $D$  apart then there are approximately  $\frac{D}{d}$  hops for a pair and the end-to-end aggregate flow throughput for the whole network is given by  $\frac{\Theta(d)}{d} = \frac{\Theta(d)}{D} d$ . However each flow is beamed across distance  $D$ . Thus the end-to-end flow throughput in the system is given by  $\frac{\Theta(d)}{d} \times D = \Theta(d) d$  in bit-metres/sec. Therefore, the objective function that is to be maximized can be defined as  $\phi(P(h), d) \triangleq \Theta(d) d$ . Power control  $P(h)$  is applied to indemnify the effects of randomly varying path-loss due to the random distance separation between consecutive relay nodes. Hence  $P(h)$  depends only on this random distance that we denote by  $l$  and not on the distance between the periphery centers  $d$ . Maximizing  $\phi(P(h), d)$  can therefore be isolated into first maximizing over  $P(h)$  and then maximizing over  $d$ . Consequently we seek to solve the following problem

$$\max_d \max_{P(h): E[P(h)] \leq \bar{P}} \phi(P(h), d) \quad \text{or} \quad \max_d \max_{P(h): E[P(h)] \leq \bar{P}} \frac{p_s \left( \int_h L(h) g_H(h) dh \right) d}{p_i T_i + p_c T_c + p_s (T_o + p_{tr} T)} \quad (1)$$

Consider the 'Channel Left Idle when Bad' case [1] when the channel is left idle for  $T$  seconds if the power  $P(h)$  allocated by the transmitter is 0 for any channel state  $h$  or equivalently the case of  $p_{tr} = 0$  for  $P(h) = 0$ . Then we see that the denominator of the objective function  $\phi(P(h), d)$  in Equation 1 does not depend on  $P(h)$  and  $d$ . Thus maximizing  $\phi(P(h), d)$  over  $P(h)$  reduces to maximizing

$$d \cdot \int_h L(h) g_H(h) dh = \frac{W T d}{\ln 2} \int_h \ln \left( 1 + \frac{P(h) h \alpha}{\sigma^2} \right) g_H(h) dh \quad (2)$$

over  $P(h)$ , subject to an average network power constraint given by  $\frac{p_c E_c + p_s (E_o + \int_h P(h) g_H(h) dh T)}{p_i T_i + p_c T_c + p_s (T_o + T)} \leq \bar{P}$  where  $E_c$  and  $E_o$  are energy overheads due to collision and transmission respectively. As the denominator of the power constraint is a constant independent of  $P(h)$  and  $d$ , the above power constraint can

be rewritten as  $\int_h P(h)g_H(h) dh \leq \bar{P}$ . This is however a well known optimization problem that has a water-pouring form solution given by  $P(h) = \left(\frac{WTd}{\lambda \ln 2} - \frac{\sigma^2}{h\alpha}\right)^+$  where  $\lambda$  is obtained from  $\int_h P(h)g_H(h) dh = \bar{P}$ . For computing  $\lambda$ , in the following section we determine the path-loss distribution  $g_H(h)$ .

#### IV. OBTAINING THE PATH-LOSS DISTRIBUTION

In the network model described before in Section II, we assume a spatially dense spread-out of nodes with the periphery of nodes overlapping with each other. However, according to the feasibility of hop distance assumption  $d > 2a$ , the circular peripheries of consecutive relay nodes, constituting a route in a multi-hop connection, do not overlap. For simplicity, let the radius of circular periphery of all nodes be same and equal to  $a$  meters. Consider two circles  $\mathcal{C}_1$  and  $\mathcal{C}_2$  of radius  $a$  centered at  $(0, 0)$  and  $(d, 0)$  with two consecutive relay nodes of a route, moving according to the mobility model described before, one in each one of them. Packets are beamed between this transmitter-receiver pair after the transmitter wins a transmission opportunity at the end of a contention attempt. At the next transmission opportunity, either only the transmitter or only the receiver or both or none would have moved to another random point(s) in the circle(s). We assume that nodes have relatively large pause times as compared to the average time interval between two consecutive transmission opportunities of a node pair. Note that we assume only moderately large pause-times and not very large. We also assume that the period of movement (time interval between initial position and final position) is small as compared to the pause times. Then, the path-loss between a transmitter and receiver will be random owing to the random distance separation phenomenon between the two nodes. In the following part of this section we first compute  $f_L(l)$  the PDF of random distance between any two points in two circles and then later compute the path-loss distribution  $g_H(h)$  from  $f_L(l)$ .

##### A. PDF of random distance between two circles

Let the distance between two randomly chosen points  $p_1$  and  $p_2$  in each of the two circles  $\mathcal{C}_1$  and  $\mathcal{C}_2$  shown in Figure 3 be denoted by  $l$ . Then the probability density for this random distance  $l$  can be computed as

$$f_L(l) = \frac{\int_{\mathcal{C}_1} d\vec{p}_1 \int_{\mathcal{C}_2} \delta(|\vec{p}_1 - \vec{p}_2| - l) d\vec{p}_2}{\int_{\mathcal{C}_1} d\vec{p}_1 \int_{\mathcal{C}_2} d\vec{p}_2}$$

where  $\delta(\cdot)$  is Dirac's delta function. For a fixed  $l$ , the term  $\int_{\mathcal{C}_2} \delta(|\vec{p}_1 - \vec{p}_2| - l) d\vec{p}_2$  in the numerator of the equation above, represents the length of an arc of the circumference of a circle of radius  $l$  centered at

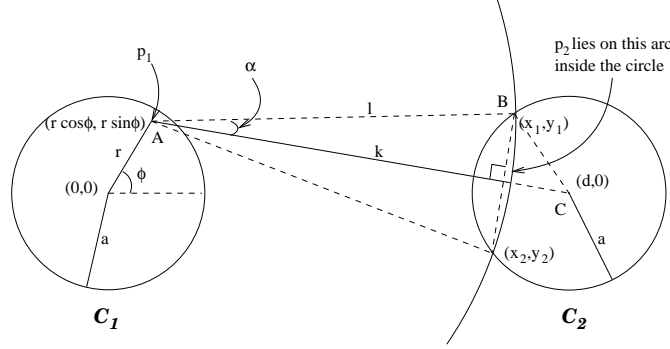


Fig. 3. Random distance between two consecutive relay nodes moving inside their circular peripheries

$\vec{p}_1$ , that lies inside  $C_2$ . Referring to the geometry shown in Figure 3, if  $k$  is the distance from the center of the circle of radius  $l$ , centered at  $p_1 = (r \cos \phi, r \sin \phi)$ , to the line joining points of its intersection with  $C_2$ , then the length of the arc inside  $C_2$  is given by  $2l\alpha$ , where  $\alpha = \arccos\left(\frac{k}{l}\right)$ . Using polar coordinates and  $d\vec{p}_1 = r dr d\phi$ , the numerator can thus be written as  $2l \int_{C_1} \arccos\left(\frac{k}{l}\right) r dr d\phi$ . The denominator is simply the product of the areas of  $C_1$  and  $C_2$  given by  $\pi^2 a^4$ . For computing  $k$  we proceed as follows. Consider the two circles centered at  $(r \cos \phi, r \sin \phi)$  and  $(d, 0)$  with radii  $l$  and  $a$ , respectively. Denote the difference between their  $x$  coordinates as  $e = d - r \cos \phi$ , difference between their  $y$  coordinates as  $f = 0 - r \sin \phi$  and distance between their centers by  $p = \sqrt{e^2 + f^2}$ . Now in  $\triangle ABC$ , the cosine formula for triangles gives  $a^2 = l^2 + p^2 - 2lp \cos \alpha$ . But we also have  $\cos \alpha = \frac{k}{l}$  and this gives the distance between center of first circle and line joining points of their intersection as  $k = \frac{p^2 + l^2 - a^2}{2p}$ . Note that  $l$  can vary as  $d - 2a \leq l \leq d + 2a$ . Now, from previous discussion, the distribution  $f_L(l)$  can be written as

$$f_L(l) = \frac{2l}{\pi^2 a^4} \int \int_{C_1^o} r \arccos \left[ \frac{d^2 + r^2 - 2dr \cos \phi + l^2 - a^2}{2l \sqrt{d^2 + r^2 - 2dr \cos \phi}} \right] dr d\phi \quad (3)$$

where  $C_1^o$  is a sub-region of the circle  $C_1$  given by  $\cos \phi \geq \frac{d^2 + r^2 - (l+a)^2}{2dr}$  for  $d - 2a \leq l < d$  and  $\cos \phi \leq \frac{d^2 + r^2 - (l-a)^2}{2dr}$  for  $d < l \leq d + 2a$ . The sub-regions are derived using the bounds  $l - a \leq p$  and  $l + a \geq p$  for the two circles to intersect. We have not been able to integrate  $f_L(l)$  to obtain a closed form expression and hence we will pursue numerical analysis in Section V.

### B. Path-loss distribution as transformation of $f_L(l)$

The path-loss  $h$  for a transmission distance  $l$  is given by  $h = \frac{1}{l^\eta}$  where  $\eta$  is the path-loss exponent. Since  $l$  is randomly changing due to mobility of nodes, the transmissions encounter random path-loss. For mathematical convenience let  $h$  be defined as  $h := \left(\frac{d}{l}\right)^\eta$ , then the path-loss distribution  $g_H(h)$  can

be computed as

$$g_H(h) = f_L \left( \frac{d}{h^{\frac{1}{\eta}}} \right) \left| \frac{-d}{\eta \cdot h^{1+\frac{1}{\eta}}} \right|$$

From Equation 3,  $g_H(h)$  is thus given by

$$g_H(h) = \frac{2}{\pi^2 a^4} \frac{d^2}{\eta \cdot h^{1+\frac{2}{\eta}}} \int \int_{\mathcal{C}_1^o} r \arccos \left[ \frac{d^2 + r^2 - 2dr \cos \phi + \frac{d^2}{h^{\frac{2}{\eta}}} - a^2}{2 \frac{d}{h^{\frac{1}{\eta}}} \sqrt{d^2 + r^2 - 2dr \cos \phi}} \right] dr d\phi$$

where  $\mathcal{C}_1^o$  is the region  $\cos \phi \geq \frac{d^2 + r^2 - \left(\frac{d}{h^{1/\eta}} + a\right)^2}{2dr}$  for  $1 < h \leq \left(\frac{d}{d-2a}\right)^\eta$  and  $\cos \phi \leq \frac{d^2 + r^2 - \left(\frac{d}{h^{1/\eta}} - a\right)^2}{2dr}$  for  $\left(\frac{d}{d+2a}\right)^\eta \leq h < 1$ .

## V. OPTIMAL HOP DISTANCE BY NUMERICAL ANALYSIS

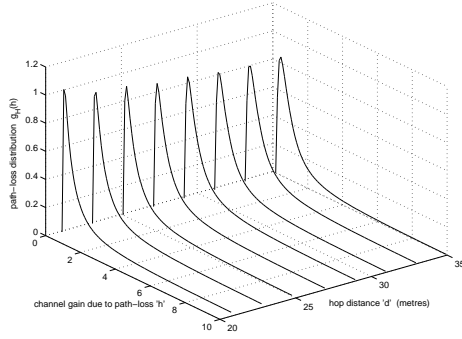
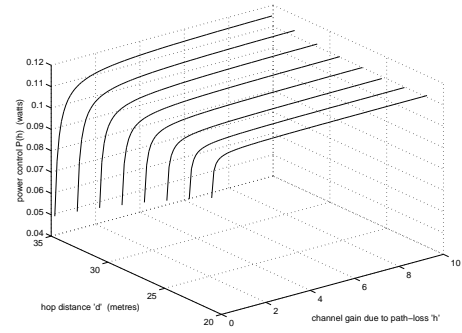
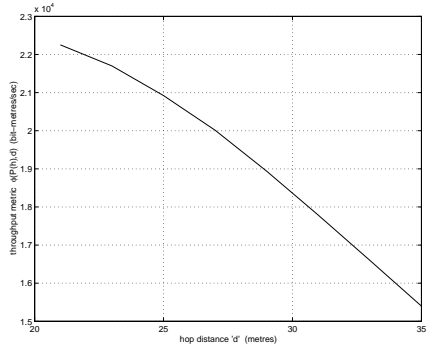
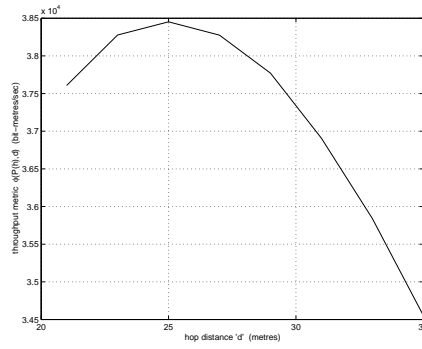
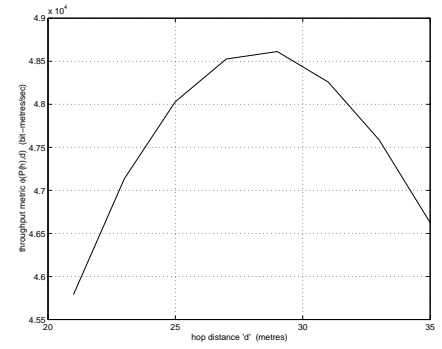
Having obtained the path-loss distribution in the previous section, we now obtain the optimal hop distance  $d$  with the help of numerical analysis, since we have not been able to symbolically integrate  $g_H(h)$  to obtain a closed form expression. With  $h$  defined in the previous section, the expression for  $\phi(P(h), d)$  from Equation 2 becomes

$$\frac{WTd}{\ln 2} \int_h \ln \left( 1 + \frac{P(h)h\alpha}{\sigma^2 d^\eta} \right) g_H(h) dh$$

with the optimal power control  $P(h)$  given by  $P(h) = \left( \frac{WTd}{\lambda \ln 2} - \frac{\sigma^2 d^\eta}{h\alpha} \right)^+$ . In order to obtain the optimal hop distance  $d$  for a particular case, in Figures 6- 8 we plot  $\phi(P(h), d)$  against the hop distance  $d$  for  $W = 20MHz$ ,  $T = 20\mu s$ ,  $\sigma^2 = 2.208 * 10^{-13}watts$ ,  $\eta = 4$ ,  $a = 10m$  and different values of  $\bar{P}$ . Figure 6 shows that the optimal hop distance, for nodes moving in a periphery circle of radius  $a = 10m$  and average network power  $\bar{P} = 0.01watts$ , is the distance to the nearest node. In other words, the throughput metric  $\phi(P(h), d)$  is maximized while choosing the smallest possible hop distance. However, similar Figures 7 and 8 for  $\bar{P} = 0.05watts$  and  $\bar{P} = 0.1watts$  respectively, show that non-trivial optimal hop distances are obtained and they increase with increasing average network power. An interesting shift of  $\phi(P(h), d)$  towards concavity is observed, thus yielding non-trivial optimal hop distances of  $25m$  and  $29m$ , respectively. Figures 4 and 5 show path-loss distribution  $g_H(h)$  and optimal power control  $P(h)$  for  $\bar{P} = 0.1watts$ . Note the increase in optimal throughput value with increasing  $\bar{P}$ .

## VI. CONCLUSION

In this paper we have shown that neither shortest path routing (in terms of number of hops; longest hop distance routing), nor smallest hop distance routing may be optimal for a dense mobile ad hoc network in which nodes follow a *periphery* restricted mobility model. With low average network power,

Fig. 4. Path-loss distr.  $g_H(h)$  for  $\bar{P}=0.1$  wattsFig. 5. Power control  $P(h)$  for  $\bar{P}=0.1$  wattsFig. 6.  $\phi(P(h), d)$  for  $\bar{P}=0.01$  wattsFig. 7.  $\phi(P(h), d)$  for  $\bar{P}=0.05$  wattsFig. 8.  $\phi(P(h), d)$  for  $\bar{P}=0.1$  watts

a bit-metres/sec throughput metric may be maximized at the trivial choice of nearest nodes as next hops. However, with higher amounts of average network power, we obtain optimal throughput performance at non-trivial hop distances. Apart from this performance behavior, we have also made a first attempt to derive the PDF of random distance between points in two circles.

## REFERENCES

- [1] Venkatesh Ramaiyan, Anurag Kumar and Eitan Altman "On the Transport Capacity of a Single Cell, Dense, Multihop WLAN with Fading", Unpublished manuscript.
- [2] A. Kumar, E. Altman, D. Miorandi and M. Goyal "New insights from a fixed point analysis of single cell IEEE 802.11 WLANs", Proceedings of IEEE Infocom, Miami, USA, March, 2005.
- [3] G. Bianchi, "Performance analysis of the IEEE 802.11 Distributed Coordination Function", IEEE Journal on Selected Areas in Communications, 18(3): 535-547, March 2000.
- [4] P. Samar and S.B. Wicker. "On the Behavior of Communication Links of a Node in a Multi-Hop Mobile Environment", MobiHoc, May 2004.
- [5] P. Gupta and P.R. Kumar. "A System and Traffic Dependent Adaptive Routing Algorithm for Ad Hoc Networks", 36th IEEE Conference on Decision and Control, Dec, 1997.