Markov-modulated arrival processes in queueing theory

Alain Jean-Marie
INRIA et LIRMM, University of Montpellier 2
161 Rue Ada, 34392 Montpellier Cedex 5, France
ajm@lirmm.fr

Lunteren Conference
January 2005

Plan of the talk

Introduction 3

- Modeling the traffic of networks
- Markov chains and Markov calculus

Markov-modulated arrival processes 17

- discrete: MMPP, MAP, BMAP
- continuous: MMRP
- generalization: a Semi-Markovian accumulation process

Decomposition of Markov-Modulated sources 38

- Markov chains with Markov-modulated speeds
- The MMPP/GI/1 queue
- Equivalent Bandwidth

Introduction

The mathematical modeling of computer & communication systems necessitates an accurate representation of the arrival process of information/workload.

Depending on the level of the model, this may be:

- the quantity of packets arrived in some network element before some time t,
- a quantity of frames (video), requests (transactions), or any other network Application Data Unit, tasks (computing), orders (production),
- a quantity of bytes or bits, or CPU seconds.

Mathematical models of arrivals

The appropriate mathematical object is a counting process:

$$N(t) \;=\; \text{quantity arrived in the interval } [0,t) \;.$$

Several cases:

- discrete time: $t \in \mathbb{N}$
- continuous time: $t \in \mathbb{R}$
- discrete space: $N(t) \in \mathbb{N}$
- continuous space: $N(t) \in \mathbb{R}$

Counting process: illustration

Process of arrivals of events (arrivals, departures, changes, starts, stops, etc).

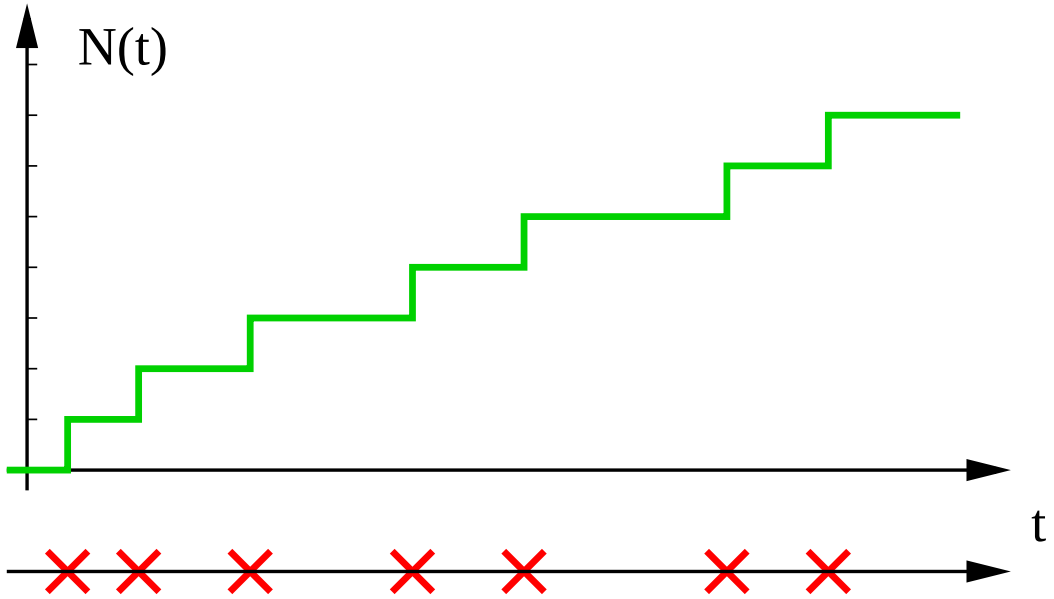

Modeling constraints

The variety of situations makes the following features necessary:

- relatively complex processes (bursts, temporal correlations, ...)
- possibly large number of sources
- ease of use, for simulation and stochastic calculus: distributions, queueing networks, asymptotics...

... with a mastered algorithmic complexity.

$\longrightarrow$ **Markov-modulated processes have these features**

Markov chains

A discrete-time Markov chain is a process $\{X(n), n \in \mathbb{N}\}$ such that:

- if $X(n) = i$, then $X(n+1) = j$ with probability p_{ij},
- jumps are independent.

A Markov chain is fully described by its

transition probabilities: $p_{i,j}, (i,j) \in \mathcal{E} \times \mathcal{E}$, or its

transition matrix P.

Example of Markov chain

Transition diagram

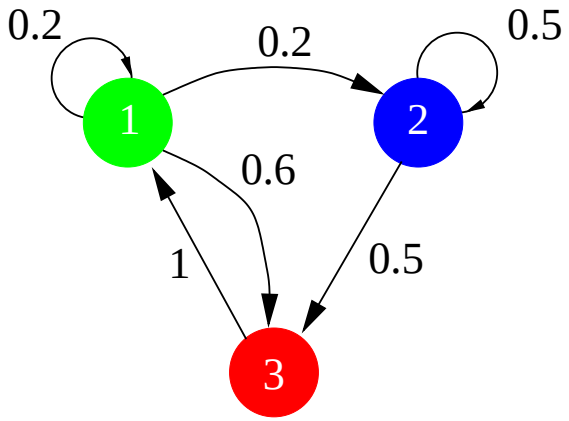

Transition matrix

$$\mathsf{P} = \begin{pmatrix} 0.2 & 0.2 & 0.6 \\ 0 & 0.5 & 0.5 \\ 1 & 0 & 0 \end{pmatrix} .$$

Continuous time Markov chains

Let $\{X(t), t \in \mathbb{R}^+\}$, having the following properties. When X enters state i:

- X stays in state i a random time, exponentially distributed with parameter τ_i, independent of the past; then
- X jumps instantly in state j with probability p_{ij}. We have $p_{ij} \in [0, 1]$, $p_{ii} = 0$ and

$$\sum_j p_{ij} = 1.$$

This process is a continuous-time Markov chain with transition rates

$$q_{ij} \;=\; \tau_i p_{ij} \;.$$

Example

$$\tau = \begin{pmatrix} 0.3 \\ 1 \\ 0.6 \end{pmatrix} \qquad \mathsf{P} = \begin{pmatrix} 0 & 1 & 0 \\ \frac{1}{2} & 0 & \frac{1}{2} \\ \frac{1}{3} & \frac{2}{3} & 0 \end{pmatrix} \qquad \mathsf{Q} = \begin{pmatrix} -0.3 & 0.3 & 0 \\ 0.5 & -1.0 & 0.5 \\ 0.2 & 0.4 & -0.6 \end{pmatrix}.$$

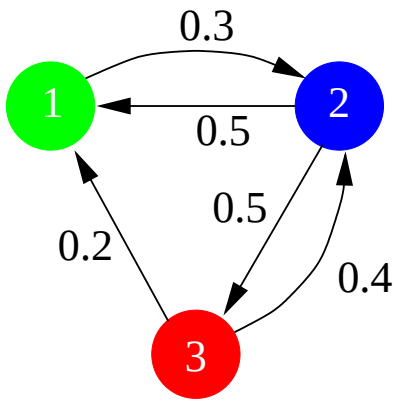

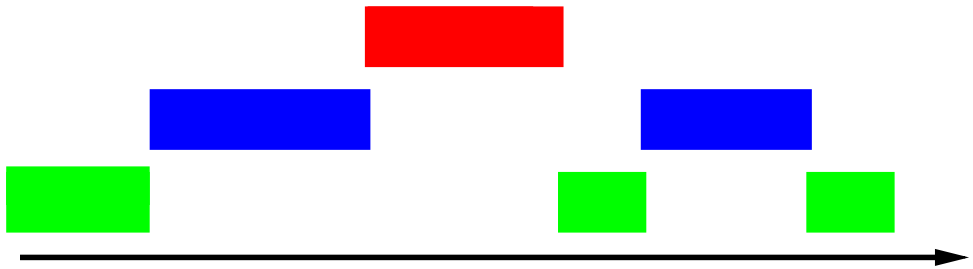

Properties and Analysis

From the computational point of view, the most useful properties of Markov processes are:

- they are described by matrices,
- computing distributions involves the solution of linear problems
- their superposition and composition leads to simple matrix computations.

Superposition of sources

If one superposes several Markov-modulated sources, the resulting process is still Markov-modulated.

The matrices (generators and rates) are obtained using Kronecker sums.

Kronecker product: consider two matrices A $(n \times n)$ and B $(m \times m)$. Their Kronecker product is a matrix $nm \times nm$ with

$$A \otimes B = \begin{pmatrix} A_{11}B & \dots & A_{1n}B \\ \vdots & & \vdots \\ A_{n1}B & \dots & A_{nn}B \end{pmatrix} .$$

Kronecker sum: a matrix $nm \times nm$ defined as

$$A \oplus B = A \otimes I(m) + I(n) \otimes B$$

$$= \begin{pmatrix} A_{11}B & & \\ & \ddots & \\ & & A_{nn}B \end{pmatrix} + \begin{pmatrix} B_{11}I & \dots & B_{1m}I \\ \vdots & & \vdots \\ B_{n1}I & \dots & B_{nn}I \end{pmatrix} .$$

Example: for two Markov chains $\{X_1(t)\}$ and $\{X_2(t)\}$, we have:

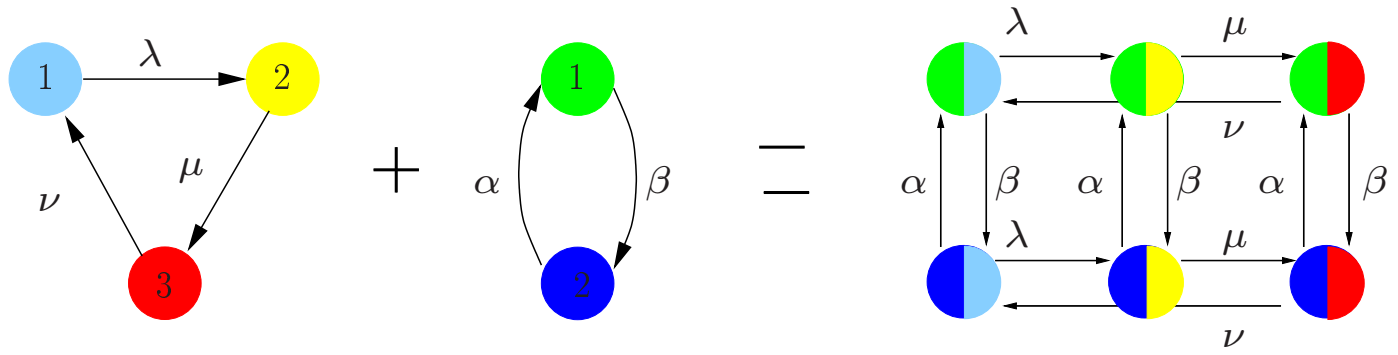

$$\begin{pmatrix} -\lambda & \lambda & 0 \\ 0 & -\mu & \mu \\ \nu & 0 & -\nu \end{pmatrix} \oplus \begin{pmatrix} -\alpha & \alpha \\ \beta & -\beta \end{pmatrix} = \left(\begin{array}{ccc|cc} - & \lambda & 0 & \alpha & 0 & 0 \\ 0 & - & \mu & 0 & \alpha & 0 \\ \nu & 0 & - & 0 & 0 & \alpha \\ \hline \beta & 0 & 0 & - & \lambda & 0 \\ 0 & \beta & 0 & 0 & - & \mu \\ 0 & 0 & \beta & \nu & 0 & - \end{array}\right)$$

Markov modulated speeds

Consider a Markov chain Z which evolves in some state space with a generator $\mathsf{M} = (m_{ab})$.

There is an "environment" X which is a CTMC with generator $\mathsf{G} = (g_{ij})$.

When X is in state i, the speed of $Z(t)$ (transition rates) is multiplied by v_i:

$$\text{rate } a \to b \;=\; m_{ab} \times v_i \;.$$

The generator of the process $(Z(t), X(t))$ has transition rates:

$$\begin{array}{lcll} (i,a) & \to & (i,b) & \text{with rate } m_{ab}v_i \\ (i,a) & \to & (j,a) & \text{with rate } g_{ij} \end{array}$$

In block-matrix form:

$$\mathsf{Q} \;=\; \begin{pmatrix} v_1\mathsf{M} + g_{11}\mathsf{I} & g_{12}\mathsf{I} & \dots & g_{1K}\mathsf{I} \\ g_{21}\mathsf{I} & v_2\mathsf{M} + g_{22}\mathsf{I} & & g_{2K}\mathsf{I} \\ \vdots & & \ddots & \\ g_{K1}\mathsf{I} & g_{K2}\mathsf{I} & \dots & v_K\mathsf{M} + g_{KK}\mathsf{I} \end{pmatrix}$$

Or, with the Kronecker notation:

$$\mathsf{Q} \;=\; \mathsf{G} \otimes \mathsf{I} + \mathsf{V} \otimes \mathsf{M} \; .$$

where

$$\mathsf{V} \;=\; \mathtt{diag}(v_1, \dots, v_K) \; .$$

Plan of the talk

Introduction 3

Markov-modulated arrival processes 17

- discrete: MMPP, MAP, BMAP
- continuous: MMRP
- generalization: a Semi-Markovian accumulation process

Decomposition of Markov-Modulated sources 38

Markov modulated arrivals

General idea:

- A Markov chain $\{X(t); t \in \mathbb{R} \text{ or } \mathbb{N}\} \in \mathcal{E}$, the phase
- A counting process $N(t)$ such that $\{(X(t), N(t))\} \in \mathcal{E} \times \mathbb{N}$ is a Markov chain.

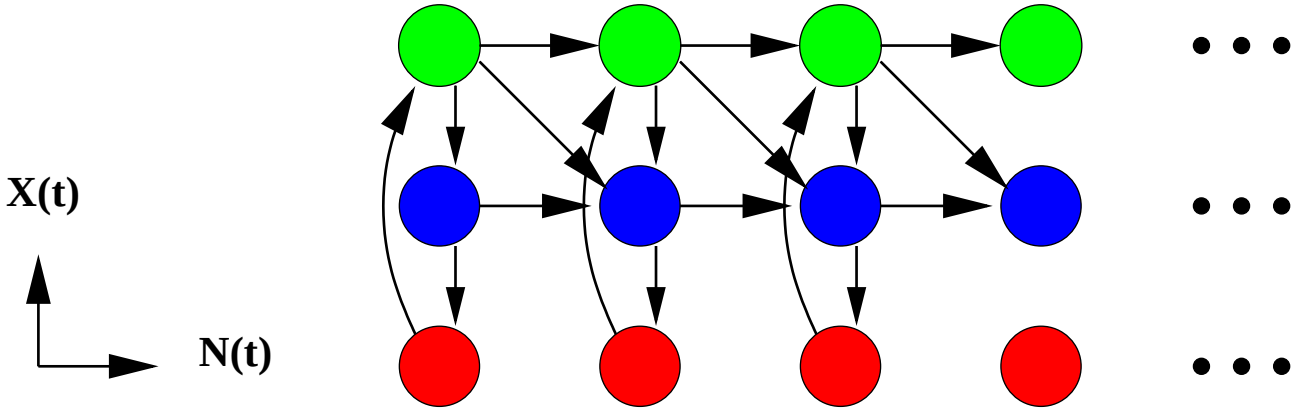

MAP: Markov Arrival Process

Let $\{X(t); t \in \mathbb{R}\}$ be a continuous-time Markov chain.

$\{N(t); t \in \mathbb{R}\}$ counts the number of jumps of X in $[0, t)$.

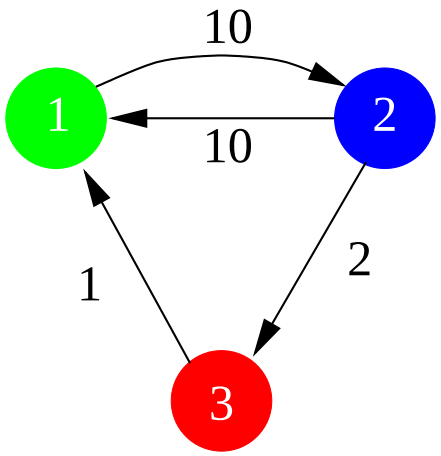

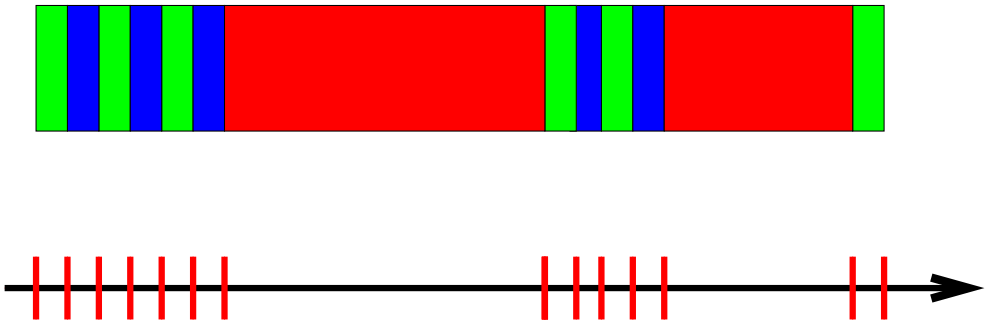

MMPP: Markov Modulated Poisson Process

Let $\{X(t); t \in \mathbb{R}\}$ be a continuous-time Markov chain in $\mathcal{E}$.

Let $\lambda_i \geq 0$ be an arrival rate, for each $i \in \mathcal{E}$.

Arrivals occur according to a Poisson process of time-varying rate $\lambda_{X(t)}$: that is, λ_i as long as $X(t) = i$.

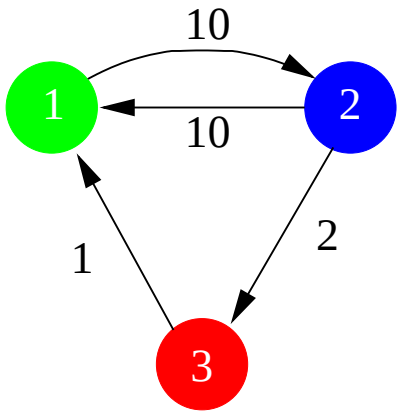

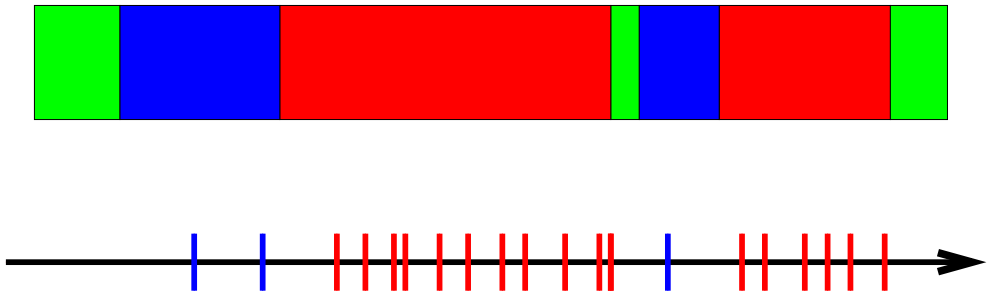

BMAP: Batch Markov Arrival Process

Also known as "N-process" (N = Neuts), or the "versatile" process.

$\{(X(t), N(t)); t \in \mathbb{R}\}$ is a continuous-time Markov chain with a generator structured as:

$$Q = \begin{pmatrix} D_0 & D_1 & D_2 & \dots & \\ & D_0 & D_1 & D_2 & \\ & & D_0 & D_1 & \ddots \\ & & & \ddots & \ddots \end{pmatrix}$$

A process in the family of Markov additive process.

MMRP: Markov Modulated Rate Process

Let $\{X(t); t \in \mathbb{R}\}$ be a continuous-time Markov chain over a finite state space $\mathcal{E}$.

Let r_i be arrival rates (or accumulation rates), for each $i \in \mathcal{E}$.

Arrivals occur according to a fluid process with rate $r_{X(t)}$, that is: with rate r_i as long as $X(t) = i$.

Let $N(t)$ the quantity arrived at time t:

$$\frac{dN}{dt}(t) \;=\; r_{X(t)} \;.$$

Note: also known as "Markov drift process".

Example. $\mathcal{E}$ with three states, $0 < r_1 < r_2$, $r_3 = 0$:

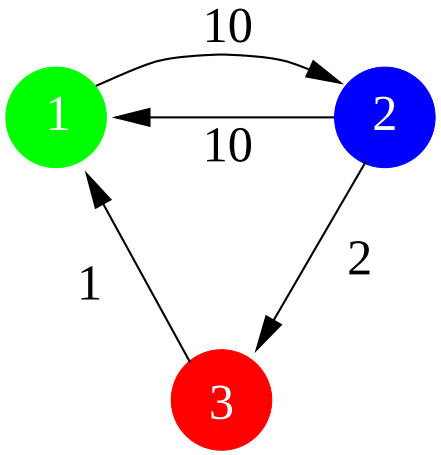

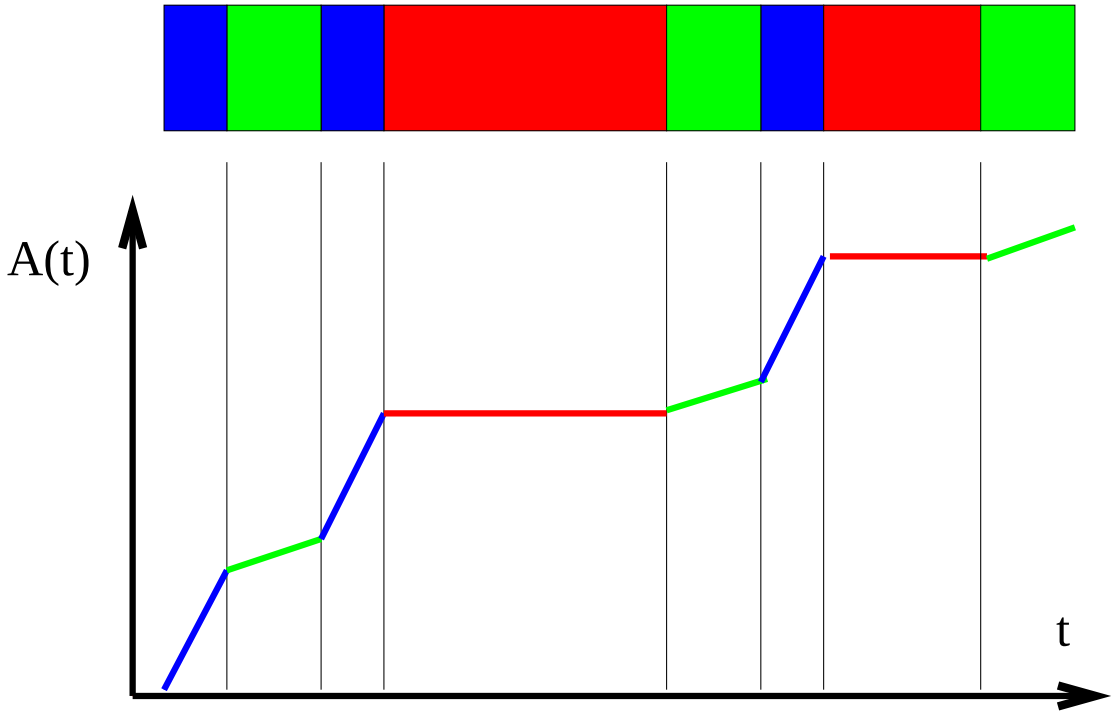

On/Off Sources

On/Off processes:

- alternating periods On and Off, with IID durations
- while in period On, arrivals according to a fluid process (constant rate) or a discrete process (Poisson ou periodic).

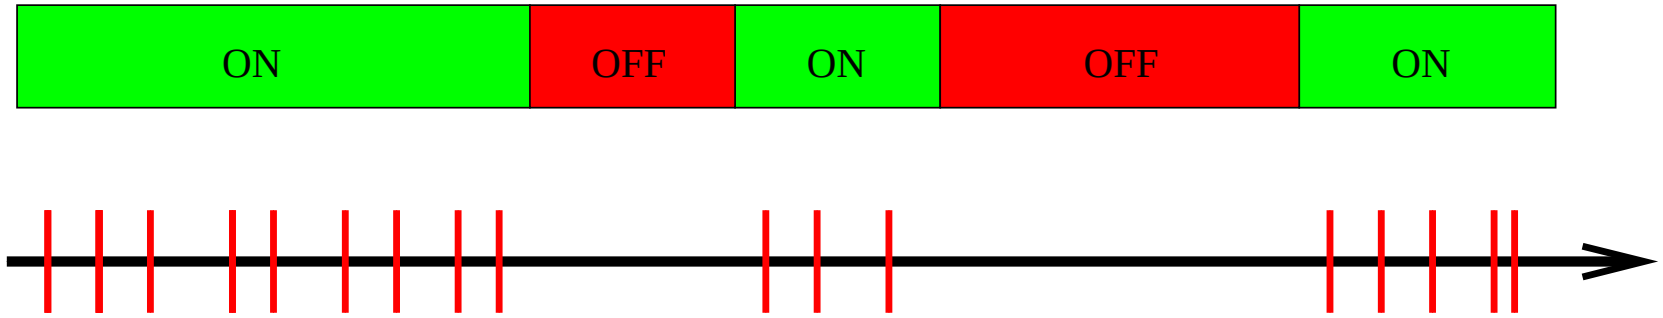

Elaborate multiscale processes

Process with arrivals of sessions, requests, packets:

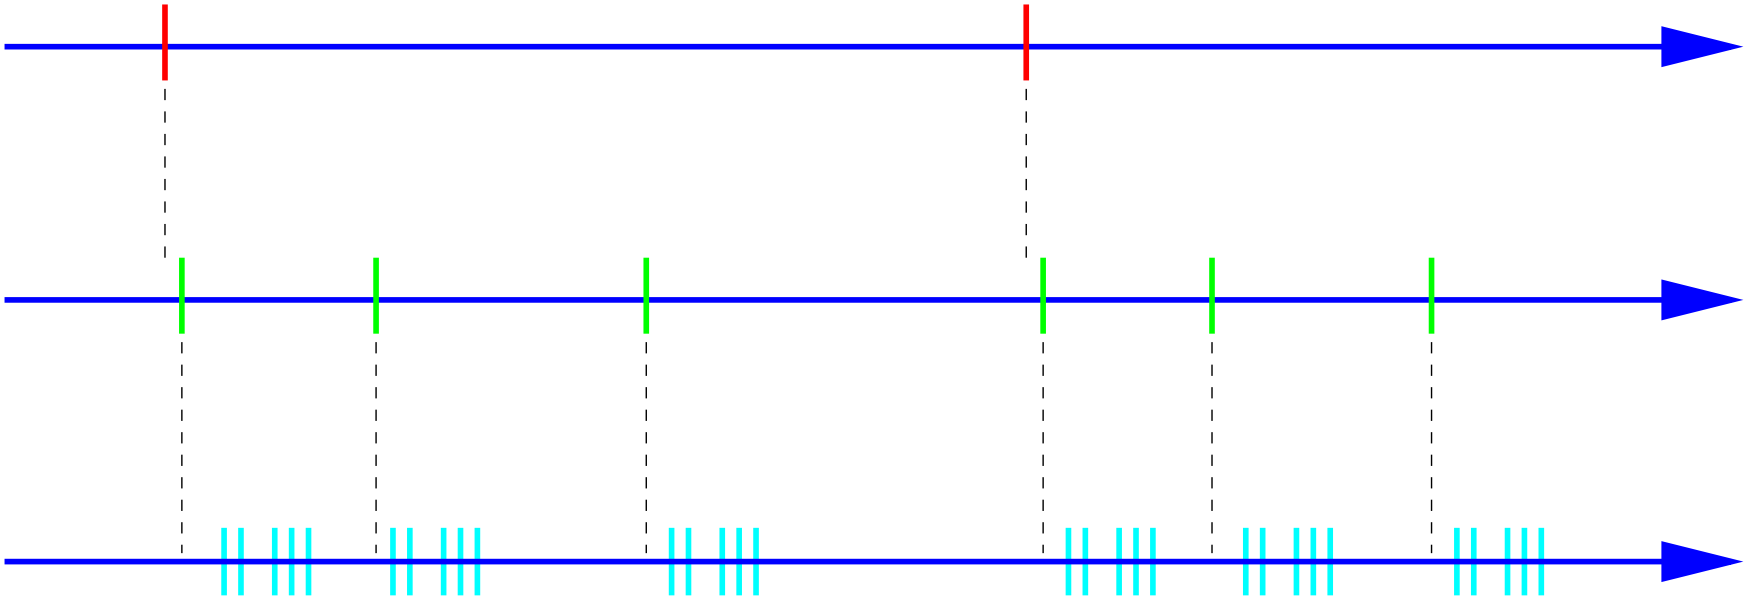

can be modeled as well with hierarchical Markov-modulated arrival processes.

Synthesis

Markov modulated sources of arrivals are described by matrices

- For a MAP:

  the generator $\mathbf{Q}$

- For a MMPP/MMRP:

  the generator $\mathbf{Q}$, and the rate matrix $\mathbf{\Lambda}$

- For a BMAP:

  the collection of transition rate matrices $D_0, D_1, \ldots$

  Most distributions and performance measures are computed using these matrices.

Examples of computations

Average arrival rate

For a MMPP/MMRP, with π the stationary probability of X,

$$\overline{\lambda} \;=\; \boldsymbol{\pi}\,\boldsymbol{\Lambda}\,\mathbf{1} \;=\; \sum_{i\in\mathcal{E}} \pi_i\,\lambda_i\;.$$

Distribution of arrivals

For a MMPP, if $A_{ij}(k,T) = \mathbb{P}\{k \text{ arrivals and} X(T) = j \mid X(0) = i\}$, then

$$\sum_k z^k A_{ij}(k,T) \;=\; \left(e^{(\mathbf{Q}-(1-z)\boldsymbol{\Lambda})T}\right)_{ij}\;.$$

Semi-Markov Accumulation Process

A generalization:

- Start with a semi-Markov process: arbitrarily distributed but state-dependent sojourn times, probabilistic jumps.
- Let the quantity accumulate at a "rate" depending on the state,
- plus random increments at jump times

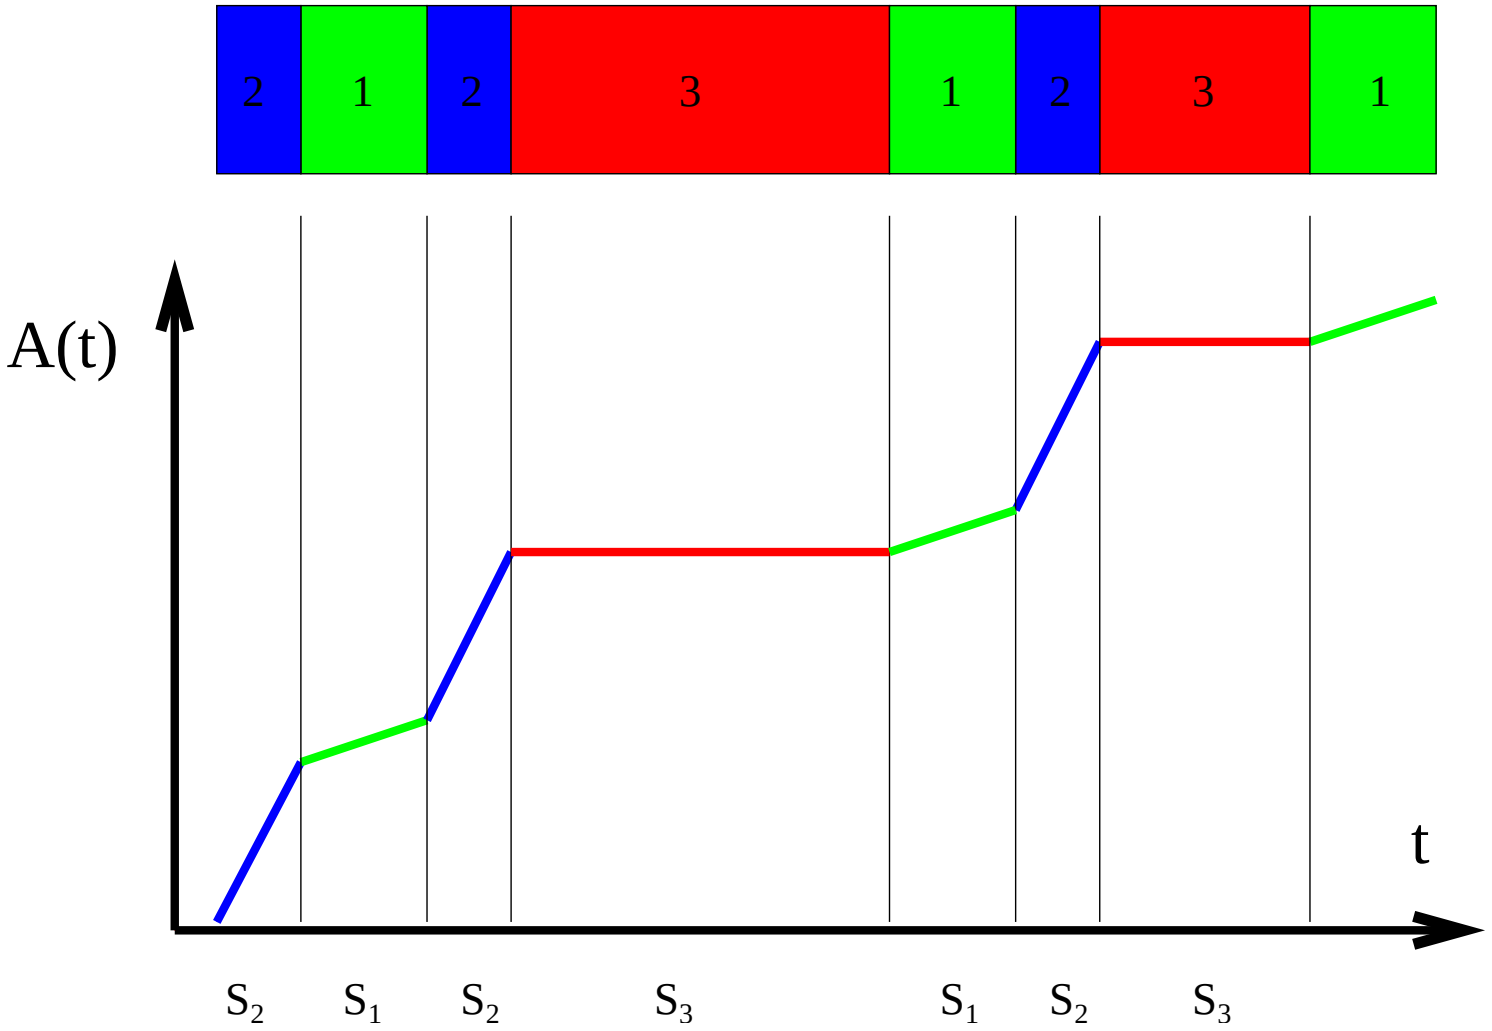
2
1
2
3
1
2
3
1
A(t)
t
S2
S1
S2
S3
S1
S2
S3

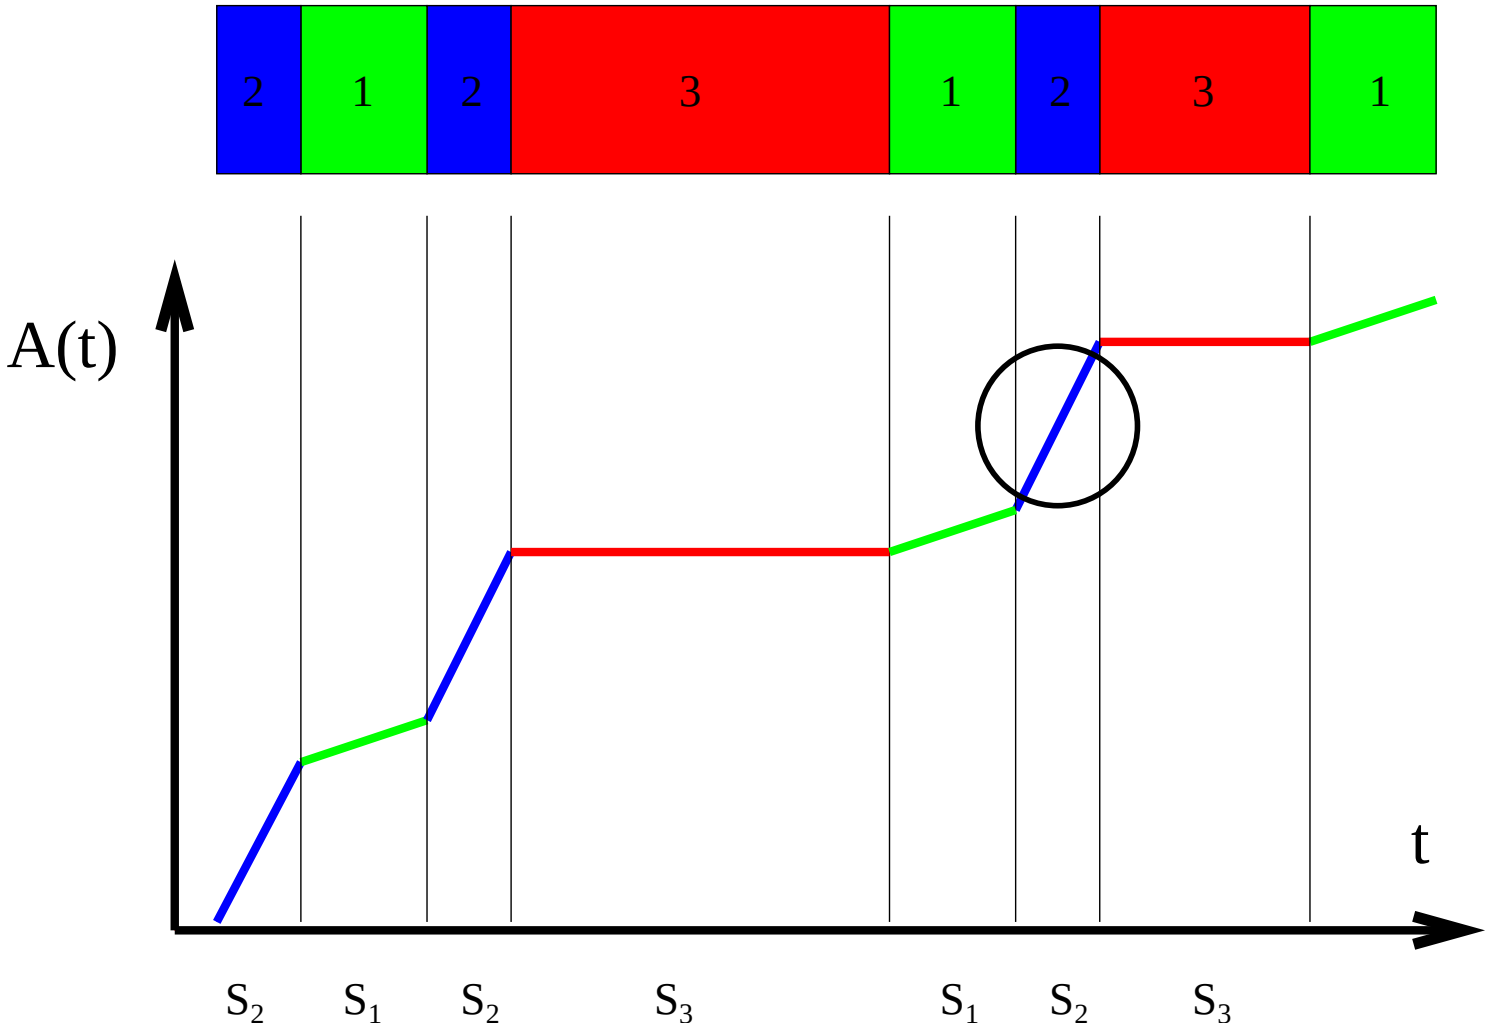
2
1
2
3
1
2
3
1
A(t)
t
S2
S1
S2
S3
S1
S2
S3

The process of accumulation is an independent-increments process:

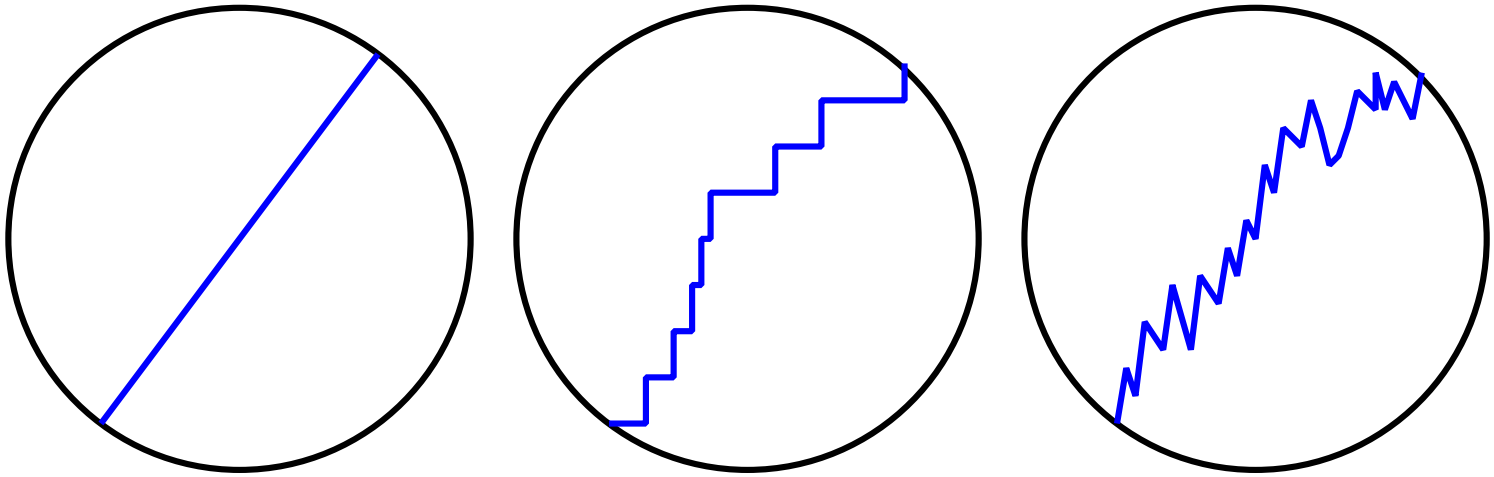

constant-rate Poisson diffusion

or a mixture of them.

For independent-increment processes, it is known (*e.g.* Doob (1952)) that:

$$\mathbb{E}(e^{-\nu(x(t)-x(s))}) \;=\; e^{-(t-s)\phi(\nu)} \;.$$

For instance:

$$\begin{aligned}
\phi(\nu) &= r\nu && \text{for a constant-rate accumulation } r \\
\phi(\nu) &= r(1-e^{-\nu}) && \text{for a Poisson process with rate } r \\
\phi(\nu) &= r\nu + \tfrac{1}{2}\sigma^2\nu^2 && \text{for a diffusion process with drift } r \text{ and variance } \sigma^2 \;.
\end{aligned}$$

Distribution of the accumulated quantity

$Q(T)$ being the quantity accumulated at time T, consider the Laplace transform:

$$K_{i,j}(\mu,\nu) = \int_0^\infty e^{-\mu T} \int_0^\infty e^{-\nu x} \; \mathbb{P}\{Q(T) \leq x, X(T) = j | X(0) = i\} \, \mathrm{d}x\mathrm{d}T$$

$$\mathsf{K} = (K_{i,j}(\mu,\nu))_{(i,j)\in\mathcal{E}\times\mathcal{E}} \qquad \mathsf{S} = \mathrm{diag}\,(S_i^*(\mu+\phi_i(\nu)))_{i\in\mathcal{E}}$$

$$\mathsf{L} = \mathrm{diag}\left(\frac{1}{\mu+\phi_i(\nu)}\right)_{i\in\mathcal{E}}$$

Then (standard arguments, *e.g.* Cox & Miller (1965) for $K = 2$):

$$\mathsf{K} = \mathsf{L}\,(\mathsf{I}-\mathsf{S}) + \mathsf{SPK}$$

$$\mathsf{K} = (\mathsf{I}-\mathsf{SP})^{-1}\,\mathsf{L}\,(\mathsf{I}-\mathsf{S})\;.$$

Plan of the talk

Introduction ____ 3

Markov-modulated arrival processes ____ 17

Decomposition of Markov-Modulated sources ____ 38

- Markov chains with Markov-modulated speeds
- The MMPP/GI/1 queue
- Equivalent Bandwidth

Decomposition of sources

Principle:

- some source of information is composed of several simpler Markov-modulated sources,
- some computation is required (transients, autocorrelations, distribution of a queue, asymptotics, ...)
- Q:is it possible to reduce the computation to that with the smaller sources?
- A:yes: sometimes, a complexity gain is obtained, sometimes even a full decomposition.

Method: Coupled Eigenvalue Problems, after Anick-Mitra-Sondhy (1982), Stern-Elwalid-Mitra (199x).

Markov modulated speeds

Consider again the Markov chain Z with generator $\mathbf{M}$, modulated by a speed process with generator $\mathbf{G}$, and speeds $\mathbf{V}$. We have seen that:

$$\mathbf{Q} = \mathbf{G} \otimes \mathbf{I} + \mathbf{V} \otimes \mathbf{M} .$$

Problem: compute the transition probabilities, whith are the elements of the matrix $e^{\mathbf{Q}t}$. A standard method is to diagonalize $\mathbf{Q}$: find its eigenvalues and eigenvectors.

$$\mathsf{Q} \;=\; \mathsf{G} \otimes \mathsf{I} + \mathsf{V} \otimes \mathsf{M}\,.$$

If one chooses x and y such that:

$$\begin{aligned} x\,\mathsf{M} &= \lambda\, x \\ y &= (a_1 x, \ldots, a_N x) \;=\; a \otimes x\,. \end{aligned}$$

Then

$$\begin{aligned} y\,\mathsf{Q} &= (a \otimes x)\;(\mathsf{G} \otimes \mathsf{I} + \mathsf{V} \otimes \mathsf{M}) \\ &= a\mathsf{G} \otimes x\mathsf{I} \;+\; a\mathsf{V} \otimes x\mathsf{M} \\ &= a\,(\mathsf{G} + \lambda\mathsf{V}) \;\otimes\; x\,. \end{aligned}$$

It is enough to choose a such that $a(\mathsf{G} + \lambda\mathsf{V}) = \mu a$ for $y\mathsf{Q} = \mu y$ to hold.

Diagonalization Algorithm

- Find the spectral elements of M:

$$\rightarrow \quad (\lambda_i; x_i, y_i) \qquad i = 1..K \ .$$

- For each i, find the spectral elements of $\mathsf{G} + \lambda_i \mathsf{V}$:

$$\rightarrow \quad (\mu_{ij}; a_{ij}, b_{ij}) \qquad i = 1..K, \ j = 1..N \ .$$

- Obtain the spectral elements of Q:

$$\rightarrow \quad (\mu_{ij}; a_{ij} \otimes x_i, b_{ij} \otimes y_i) \qquad i = 1..K, \ j = 1..N \ .$$

Complexity:

- soit N be the sise of the state space, K the number of speeds

- $\mathbf{Q}$ is of size $NK \times NK$
- diagonalizing directly is $O(N^3K^3)$
- this algorithm is $O(K^3 + KN^3)$.

It is not even necessary to store the "big" matrix.

Markov modulated queues

Discrete queues: Markov-modulated arrivals

- exponential/Erlang/Cox service distribution $\longrightarrow$ method of phases, QBDs
- general IID services: method of the embedded Markov chain.

Fluid queues:

- partial differential equations (Chapman-Kolmogoroff).

In both cases, the results are:

- Computation through matrix formulas, generating functions, Laplace transforms.
- Spectral expansions of stationary and transient probabilities:

$$\mathbb{P}\{W > x; X = i\} \;=\; \sum_p a_{i,p}\, e^{-z_p x} \;.$$

$\longrightarrow$ asymptotics, or bounds.

$$\boxed{\mathbb{P}\{W > x; X = i\} \;\sim\; a_{i,1}\, e^{-z_1 x} \;, \qquad x \to \infty \;.}$$

The MMPP/GI/1 queue

Arrivals: MMPP with N states, generator $\mathbf{Q}$ and matrix of rates $\mathbf{\Lambda}$;

Services: independent with a general distribution $H(x)$, of Laplace transform $H^*(s)$.

Distribution of the workload W:

$$\mathbf{W}^*(s) \;=\; s(1-\rho)\;\mathbf{g}\;[s\mathbf{I}+\mathbf{Q}-(1-H^*(s))\mathbf{\Lambda}]^{-1}\;\mathbf{1}\;,$$

$\mathbf{g}$ vector to be determined.

This requires diagonalizing $s\mathbf{I} + \mathbf{Q} - (1 - H^*(s))\mathbf{\Lambda}$, which can be done more efficiently using the fact that if:

$$\mathsf{A} \;=\; \mathsf{A}^{(1)} \oplus \;\; \ldots \;\; \oplus \mathsf{A}^{(K)} \;,$$

and that for all k, $\mathsf{A}^{(K)}$ is diagonalizable with

$$\mathsf{A}^{(k)} \;=\; \mathsf{R}^{(k)}\mathsf{D}^{(k)}\mathsf{S}^{(k)},$$

where $\mathsf{R}^{(k)}\mathsf{S}^{(k)} = \mathsf{I}^{(k)}$ and $\mathsf{D}^{(K)} = \mathrm{diag}(\omega_i^{(k)})$. Then:

$$\mathsf{A} \;=\; \left(\bigotimes_{k=1}^{K} \mathsf{R}^{(k)}\right) \left(\bigoplus_{k=1}^{K} \mathsf{D}^{(k)}\right) \left(\bigotimes_{k=1}^{K} \mathsf{S}^{(k)}\right) \;.$$

This work since $\mathbf{Q}$ and $\mathbf{\Lambda}$ have precisely this structure.

$\Longrightarrow$ complexities reduced from $(\sum_k N_k)^3$ to $\sum_k N_k^3$.

Equivalent Bandwidth of Information Sources

Consider the multiplexing problem: K sources feed a buffer with finite buffer space B and service capacity C units of work/s.

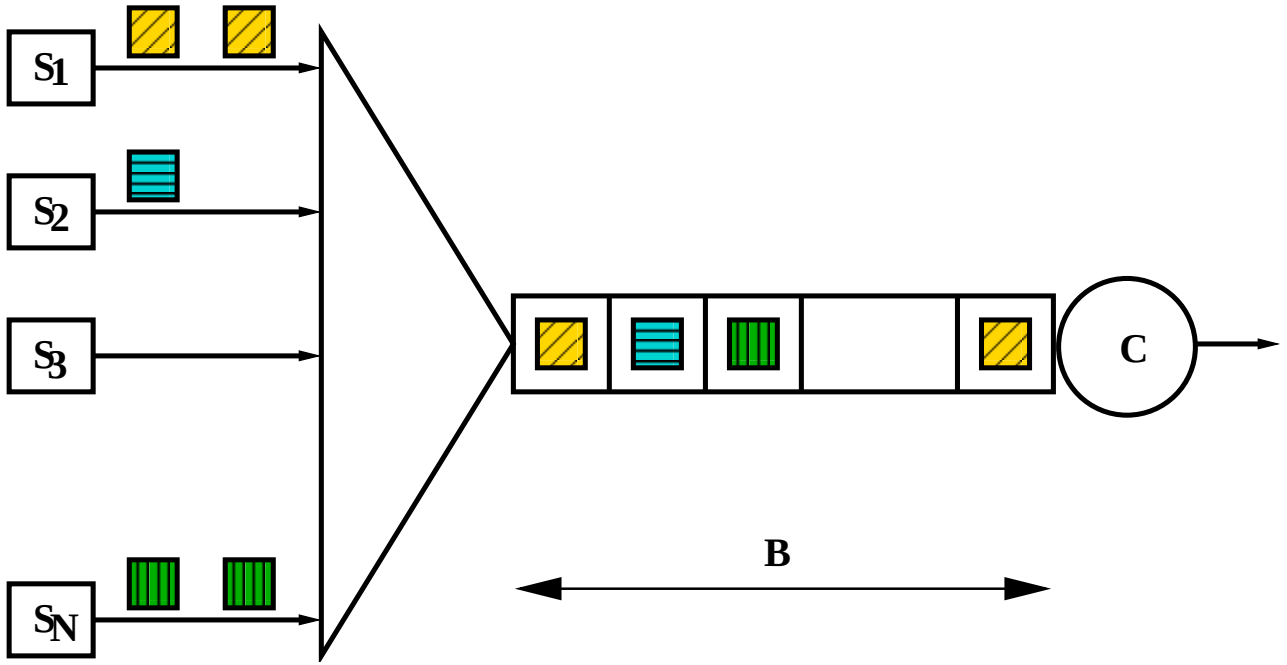

For each source k, let ρ_k be the average rate of arrival of information (the "bandwidth").

Then the queue with infinite buffer is stable if and only if

$$\sum_k \rho_k \; < \; C \; .$$

But for the overflow probabilities

$$\mathbb{P}\{W^B = B\} \; \simeq \; \mathbb{P}\{W^\infty \geq B\}$$

is there a similar property?

Yes, for Markov-Modulated sources.

Assume source k has rate matrix $\mathbf{L}^{(k)}$ and generator $\mathbf{Q}^{(k)}$.

Let $g^{(k)}(z)$ be the largest eigenvalue of $\mathbf{L}^{(k)} - \frac{1}{z}\mathbf{Q}^k$.

For B large and α small,

$$\mathbb{P}\{W^{\infty} \geq B\} \leq \alpha \qquad \Longleftrightarrow \qquad \sum_k g^{(k)}\left(\frac{\log(\alpha)}{B}\right) \leq C \ .$$

The quantity $g^{(k)}\left(\frac{\log(\alpha)}{B}\right)$ is the equivalent bandwidth at level $\log(\alpha)/B$.

Proved by Elwalid and Mitra, generalized by Kulkarni for general Markov-Renewal sources.

Bibliography

Fluid models

D. Anick, D. Mitra, and M.M. Sondhi. Stochastic theory of a data-handling system with multiple sources. *Bell Sys. Tech. J.*, 61:1871–1894, October 1982.

D. Mitra. Stochastic theory of a fluid models of producers and consumers coupled by a buffer. *Adv. Appl. Prob.*, 20:646–676, 1988.

T.E. Stern and A.I. Elwalid. Analysis of separable Markov-modulated rate models for information-handling systems. *Adv. Appl. Prob.*, 23:105–139, 1991.

A.I. Elwalid, D. Mitra, and T.E. Stern. Statistical multiplexing of Markov modulated sources:theory and computational algorihms. In A. Jensen and V.B. Iversen, editors, *Proc. 13th International Teletraffic Congress*, pages 495–500, Copenhagen, 1991. Elsevier Science.

A.I. Elwalid, D. Mitra, and T.E. Stern. A theory of statistical multiplexing of Markov modulated sources: Spectral expansions and algorihms. In W.J. Stewart, editor, *Numerical solution of Markov Chains*, 1991.

A.I. Elwalid and D. Mitra. Statistical multiplexing with loss priorities in rate-based congestion control of high speed networks. *IEEE Trans. Comm.*, 42(11):2989–3002, November 1994.

A.I. Elwalid and D. Mitra. Markovian arrival and service communication systems: Spectral expansions, separability and Kronecker-product forms. In W.J. Stewart (Ed.), *Computations in the Markov Chains*, pp. 507–546. Kluwer, 1995.

MMPP, MAP, BMAP...

M.F. Neuts. The fundamental period of a queue with Markov-modulated arrivals. In *Probability, Statistics and Mathematics: papers in honour of Samuel Karlin*. Academic Press, NY, 1989.

W. Fischer and K. Meier-Hellstern. The Markov-modulated Poisson process (MMPP) cookbook. *Performance Evaluation*, 18:149–171, 1992.

D.M. Lucantoni, G.L. Choudhury, and W. Whitt. The transient $BMAP/G/1$ queue. *Commun.*

Statist.-Stochastic Models, 10(1):145–182, 1994.

A. Jean-Marie, Z. Liu, P. Nain and D. Towsley, "Computational Aspects of the Workload Distribution in the MMPP/GI/1 Queue". *JSAC*, 1999.

Asymptotics, bounds and equivalent bandwidth

W. Whitt. Tail probabilities with statistical multiplexing and effective bandwidth. *Telecommun. Syst.*, 3:71–107, 1993.

D. Artiges and P. Nain. Upper and lower bounds for the multiplexing of multiclass Markovian on/off sources. *Performance Evaluation*, **27&28**, pp. 673–698, 1996.

V.G. Kulkarni. Effective bandwidth for Markov regenerative sources. *Queueing Systems*, **24**, pp. 137–153, 1996.

Z. Liu, P. Nain, and D. Towsley. Exponential bounds with applications to call admission. *JACM*, 44 (2):366–394, 1997.